



High Park Station Easier Access

Pre-construction Update

April 2022

Status of Easier Access Program

TTC's Easier Access Program will make all subway stations accessible to everyone, regardless of their level of mobility. Today, more than half of our stations are accessible to people with disabilities.

- 55 stations are now accessible.
- Station accessibility construction is currently underway at:
 - *Lansdowne, Donlands, College, Summerhill, Rosedale, Castle Frank, Glencairn and Greenwood stations*

All stations will be made accessible by 2025.

High Park Station elevator construction is scheduled to start Spring 2022.

The station is scheduled to be accessible by end of 2024.

Today - High Park Station, Quebec Avenue entrance



Project details

Expected timeline – Q2 2022 to end of 2024

During construction:

- Quebec Avenue entrance closed for duration of construction. All customers will be redirected to High Park Avenue entrance.
- Buses maintained inside the station, subway service maintained
- No Wi-Fi at street level, only at concourse and subway platform level
- Benches at street level relocated
- Bike racks on Quebec Avenue removed and restored at end of project. Bike parking on High Park Avenue maintained.

Customers redirected to High Park Avenue




High Park Avenue entrance, looking south-west on High Park Avenue

Project details

After project completion:

- Accessible station with two elevators – street to subway platform level
- New entrance structure on Quebec Avenue

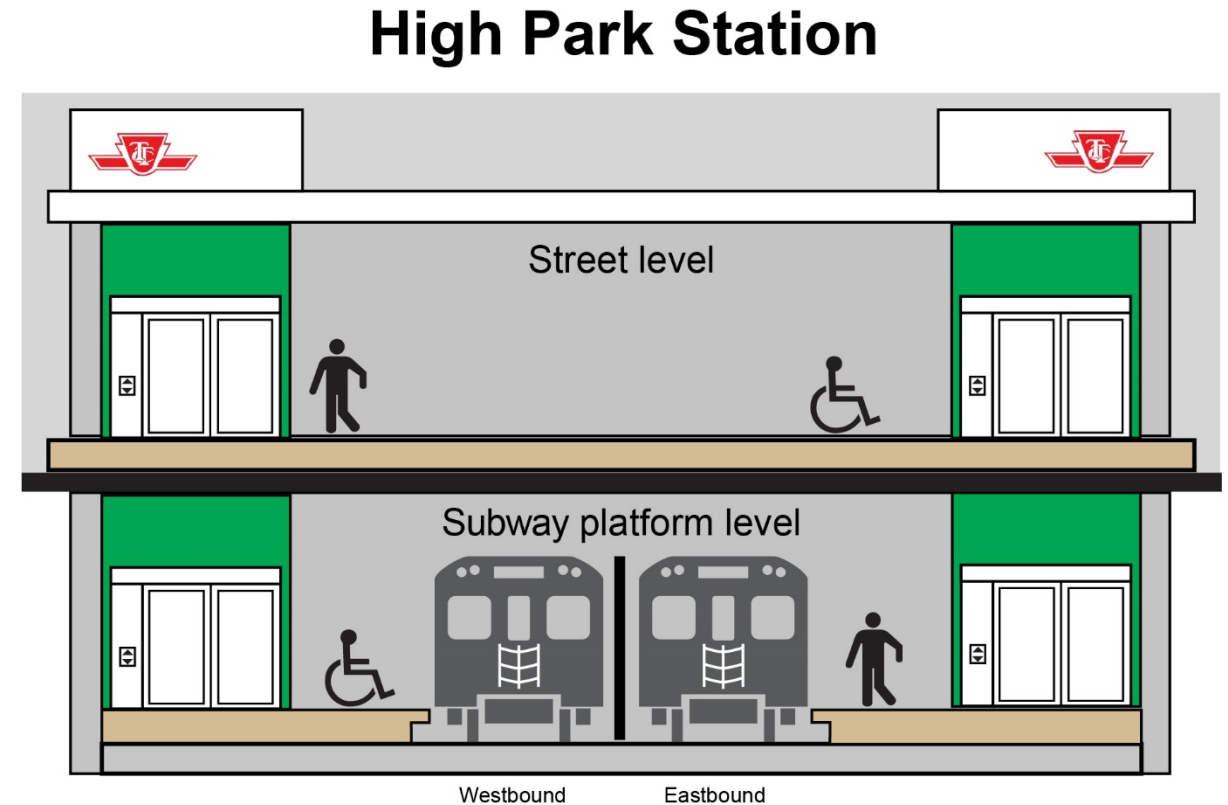

After construction - High Park Station, Quebec Avenue



Artistic rendering of Quebec Avenue entrance after construction

Scope of work

Phase 1 and 2 will require a temporary lane reduction on Quebec Avenue. City Transportation to finalize traffic plan with contractor.


Phase 1

- Duration: Q2 2022 start for approx. one month
- Scope: street level work involving service reconnections, maintenance holes, utility work, hoarding installation, preliminary caisson and shoring work, excavation

Phase 2

- Duration: Q2/Q3 2022 for approx. seven months
- Scope: caisson work, shoring, removal and demolition at street level, excavation of elevator shafts

Phase 1 and 2 – Q2/Q3 2022 for approx. 8 months

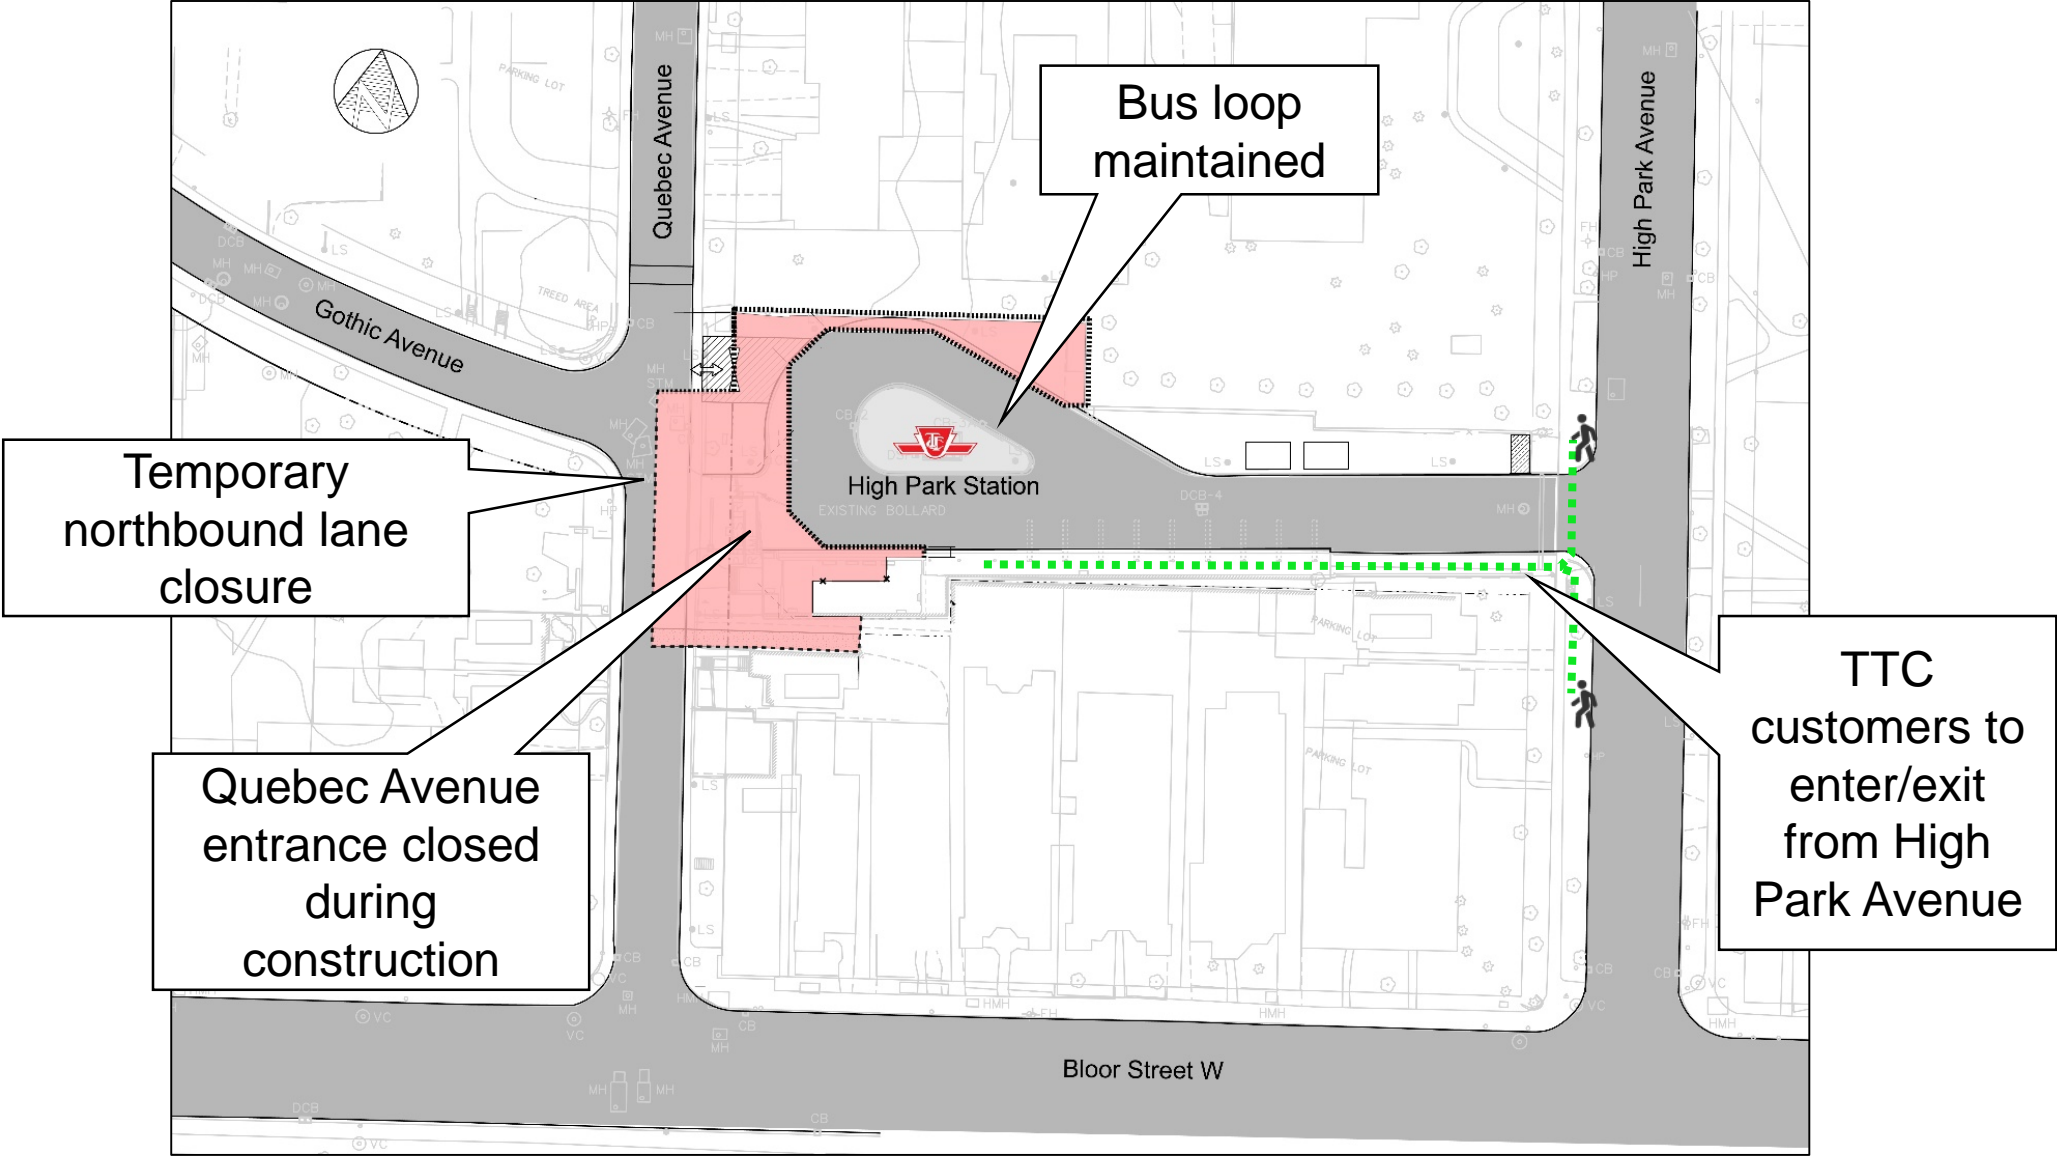


Scope of work

Phase 3 to 5

- Duration: Q2 2023 to end of 2024
- All work within TTC property
- Scope: Elevator shaft construction, structural, electrical and mechanical work, restore area impacted by construction
- Quebec Avenue re-open to two-way traffic during these phases

Phase 3 to 5 – Q2 2023 to end of 2024

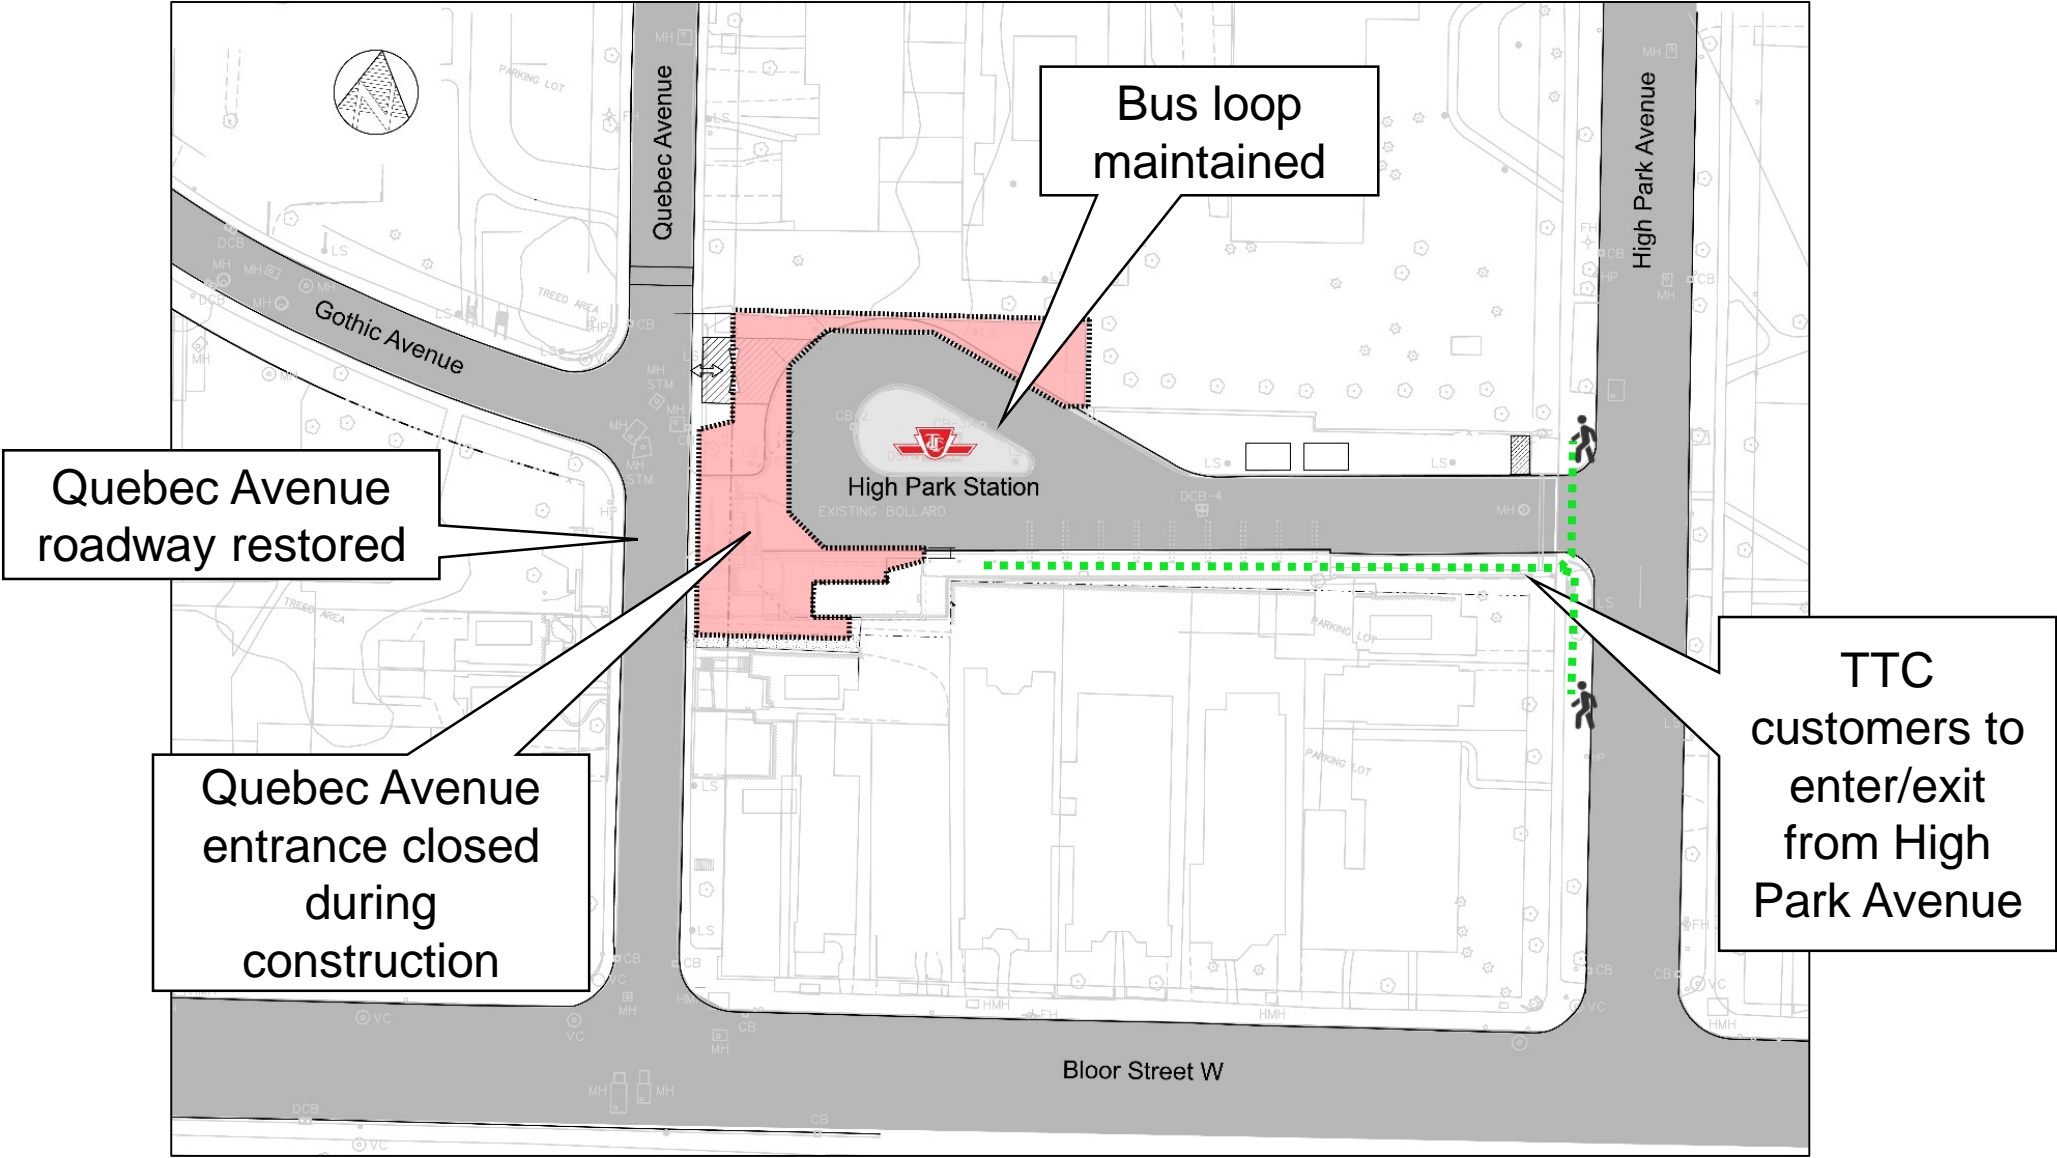

Construction Details and Transit Information:

- Major construction activities include shoring and excavation of elevator shafts
- Most work will take place from 7 a.m. to 7 p.m. Some work will occur overnight such as scaffolding installation and deliveries
- Efforts will be made to keep disruption associated with noise and dust to a minimum
- Access to stations and subway service will be maintained throughout construction



Questions or comments?

Connect with the community liaison for this project for any questions or comments, or to be added to the project mailing list:

Paul Tran, Senior Community Liaison, 647-461-5133, paul.tran@ttc.ca

